

# TERO-FIRMA


**A revolution in safety floor coatings – Heavy duty but with a stunning gloss finish**



## High quality, non-slip gloss finish floor coating

### What is Tero-Firma?

Tero-Firma is an easy to use non-slip floor coating system that comes in a range of colours. Tero-Firma cures to a decorative gloss finish which is safe and slip deterrent. Slippery surfaces can be extremely hazardous to the public and costly for business owners. Tero-Firma solves this problem with its advanced cross linking formulation. Once cured Tero-Firma will give a beautiful, durable gloss finish which is easy to clean. Tero-Firma is ideal for use in schools, hospitals, factories, leisure centres and many more.

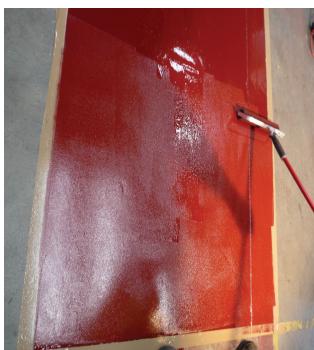

### How does Tero-Firma work?

Tero-Firma comes as a convenient two-pack epoxy formulation.

Its advanced chemically crosslinking cure will give a 400 micron coating thickness, equivalent to four coats in one. 100% solids mean that Tero-Firma won't shrink and gives fantastic adhesion to all floor surfaces including concrete, timber and steel.

### Key features and benefits of Tero-Firma

Easy to use two-pack epoxy.

**Solvent free.**

No shrinkage.

**Use Tero-Firma on a range of floor surfaces including concrete, timber and steel.**

Available in a range of colours.

**Highly durable.**

Cost effective – due to its unique formulation one coat is equivalent to 4.

**Hygienic, odourless and easy to clean.**

Resistant to a wide range of chemicals.

**Use on large or small areas.**

### Technical Information

Volume solids content: 100%

Cure times (May vary with ambient temperature)

Primer coats (Diluted with 10-15% of Tero-Firma Solvent) may be over coated in 12-16 hours.

Full coats (With or without aggregates) will bear foot traffic in 24 hours and truck traffic in 72 hours.

For full chemical resistance, cure for 7 days.

Coverage (Coverage depends on substrate type and porosity)

Primer coats will theoretically yield 20-30m<sup>2</sup> per 4.5kg.

Full coats of Tero-Firma should yield 15m<sup>2</sup> with addition of aggregates and 20m<sup>2</sup> per 4.5kg kit without aggregates.

These figures apply to correctly prepared, smooth surfaces.

Tero-Firma is resistant to a wide range of chemicals including dilute acids and alkalis, detergents, animal and vegetable oils, sugar and salt solutions.

In all cases it is essential that all chemical spillages are removed as quickly as possible and affected areas are wiped down to retain the slip-proof properties of Tero-Firma.

**TEROTECH** Riverside Industrial Estate, Fazeley, Tamworth, Staffordshire, B78 3RW.

Head Office, Warehousing and Distribution: Tel: 01827 283322, Fax: 01827 250143. Telesales: 01270 611031

The **IM Group** utilizes a process of continuous product improvement for all of our products. While we do strictly adhere to our products' specifications, we routinely implement product improvements. Therefore, please contact us for our most current product specifications. IM Group warrants the quality of this product when used according to directions. User shall determine suitability of product for use and assumes all risk. The seller will not accept liability for more than product replacement.

Trademarks: **TECHTECH** is a registered trademark and subsidiary of **IM Group**.

